


SOLEX

OFFROAD

Scuba Tank Cradle Instructions 7.25" Cylinders (LP80 HP100)

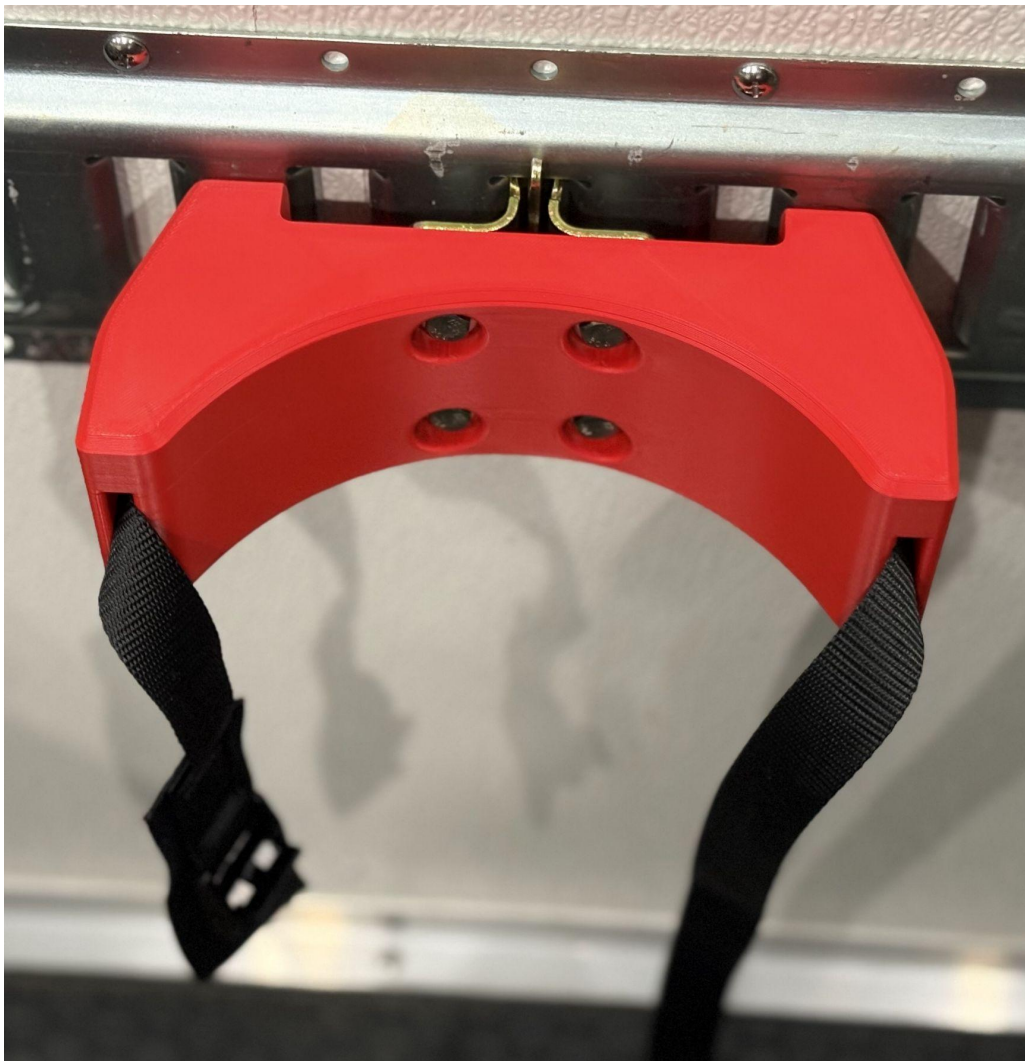

Disclaimer

By purchasing, installing, or using any product from Solex Offroad, the customer acknowledges and accepts full responsibility for any risks associated with its use. Solex Offroad and Solex Enterprises LLC are not liable for any damages, injuries, accidents, losses, or deaths that may result from the installation, use, or misuse of its products. The purchaser assumes all risks and responsibilities associated with using Solex Offroad products.

All products must be installed correctly and inspected regularly to ensure proper function and safety. Installation should be performed by a qualified professional. Solex Offroad products are sold with a limited warranty covering defects in materials and workmanship for a period of 1 year from the date of purchase. This warranty does not cover damages resulting from improper installation, modification, normal wear and tear, or use in extreme conditions.

By purchasing and using Solex Offroad products, the customer expressly waives any claims against Solex Offroad and Solex Enterprises LLC, their owners, employees, affiliates, and distributors for any liability, injury, or loss incurred. If you have any questions about product safety, installation, or usage, please contact Solex Offroad before proceeding.



Installation & Adjustment Instructions

Your **SOLEX E-Track Scuba Tank Holder** arrives fully assembled and ready for use.

Adjusting the Retaining Strap (If Desired)

Depending on cylinder size or personal preference, you may wish to reposition the retaining strap buckle.


To adjust:

1. Loosen the four bolts securing the E-Track bracket.
2. Slide the strap to the desired position.
3. Re-tighten all four bolts securely before use.

Your holder is ready to secure your tank.

Proper Use & Safety Information

- This holder is designed for use with standard 7.25" diameter scuba cylinders.
- Always verify the cylinder is fully seated in the cradle before tightening the retaining strap.
- Ensure the strap is snug and properly secured prior to transport.
- Confirm the E-Track connector is fully engaged and locked into a structurally sound, properly installed E-Track rail.
- Inspect mounting hardware, strap condition, and bracket components before each use.
- Do not use if any components are damaged, worn, or improperly installed.
- The user assumes all responsibility for proper installation, load securement, and compliance with applicable transport regulations.

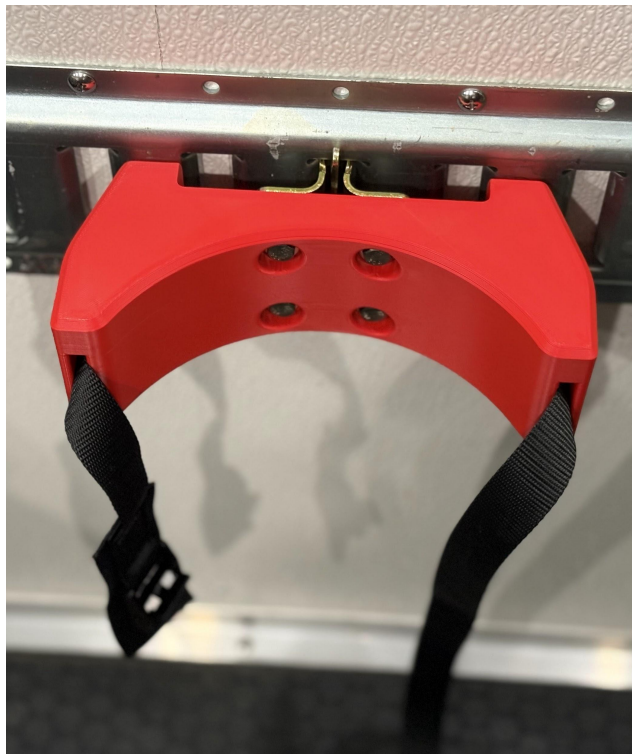

These instructions are not for redistribution or copy unless otherwise approved by Solex Enterprises LLC.